




STS Instruments Ltd

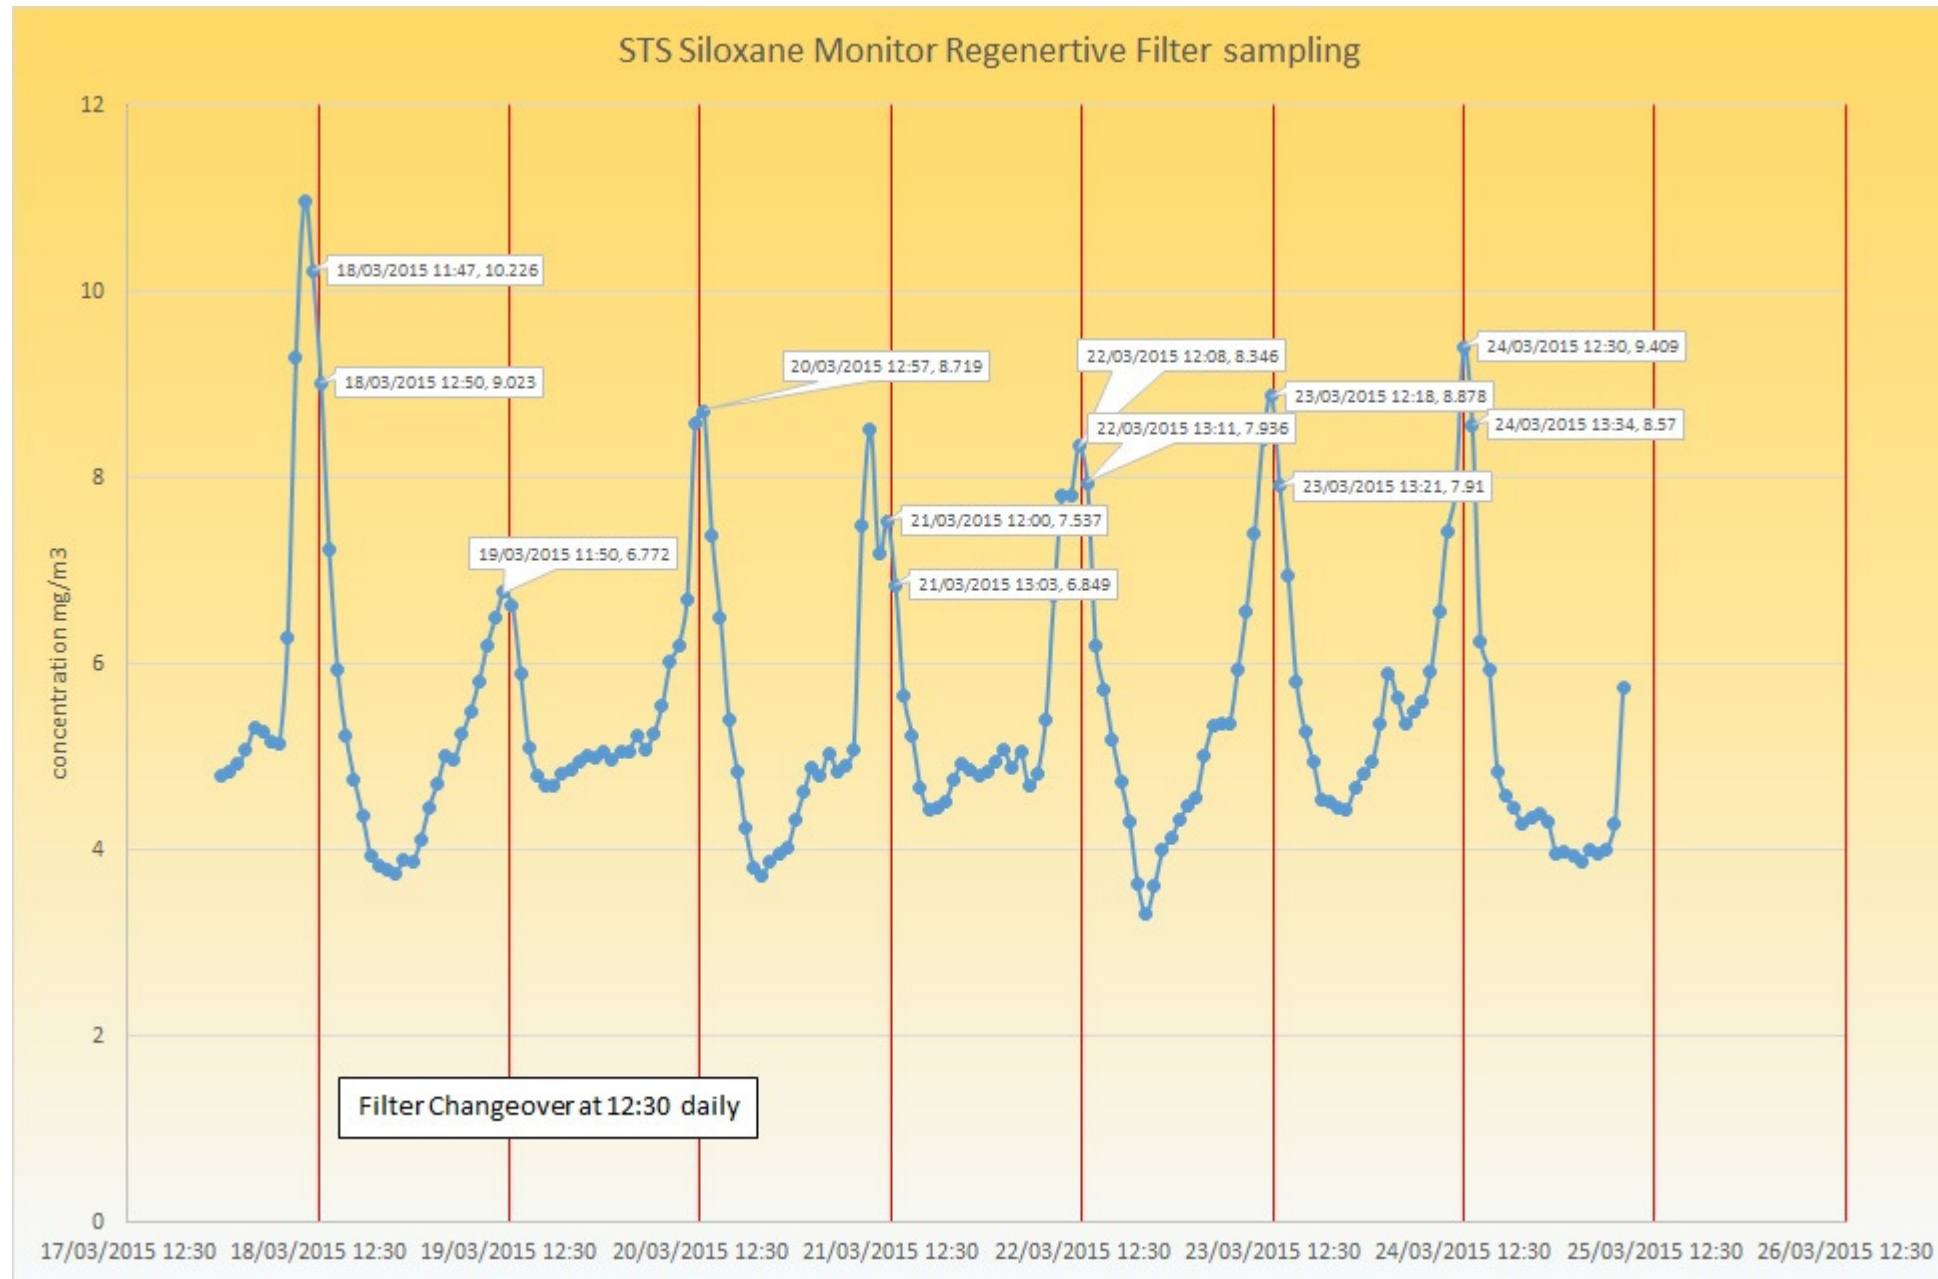

*Daily Regenerative Filter results from AD Biogas Trial*

The Siloxane Monitor may be used for the optimisation of regenerative filter regimes ensuring that the maximum capacity of the filters is used before regeneration takes place. Cost efficiencies can therefore be made saving on the frequency of expensive regeneration, the data will also give advance warning of a deterioration of the filter media and therefore less efficient siloxane removal.

